




Huawei u7519 Back Cover Replacement

This guide will show you how to remove the back covering of the phone so that the motherboard is exposed.

Written By: Savanah Anik

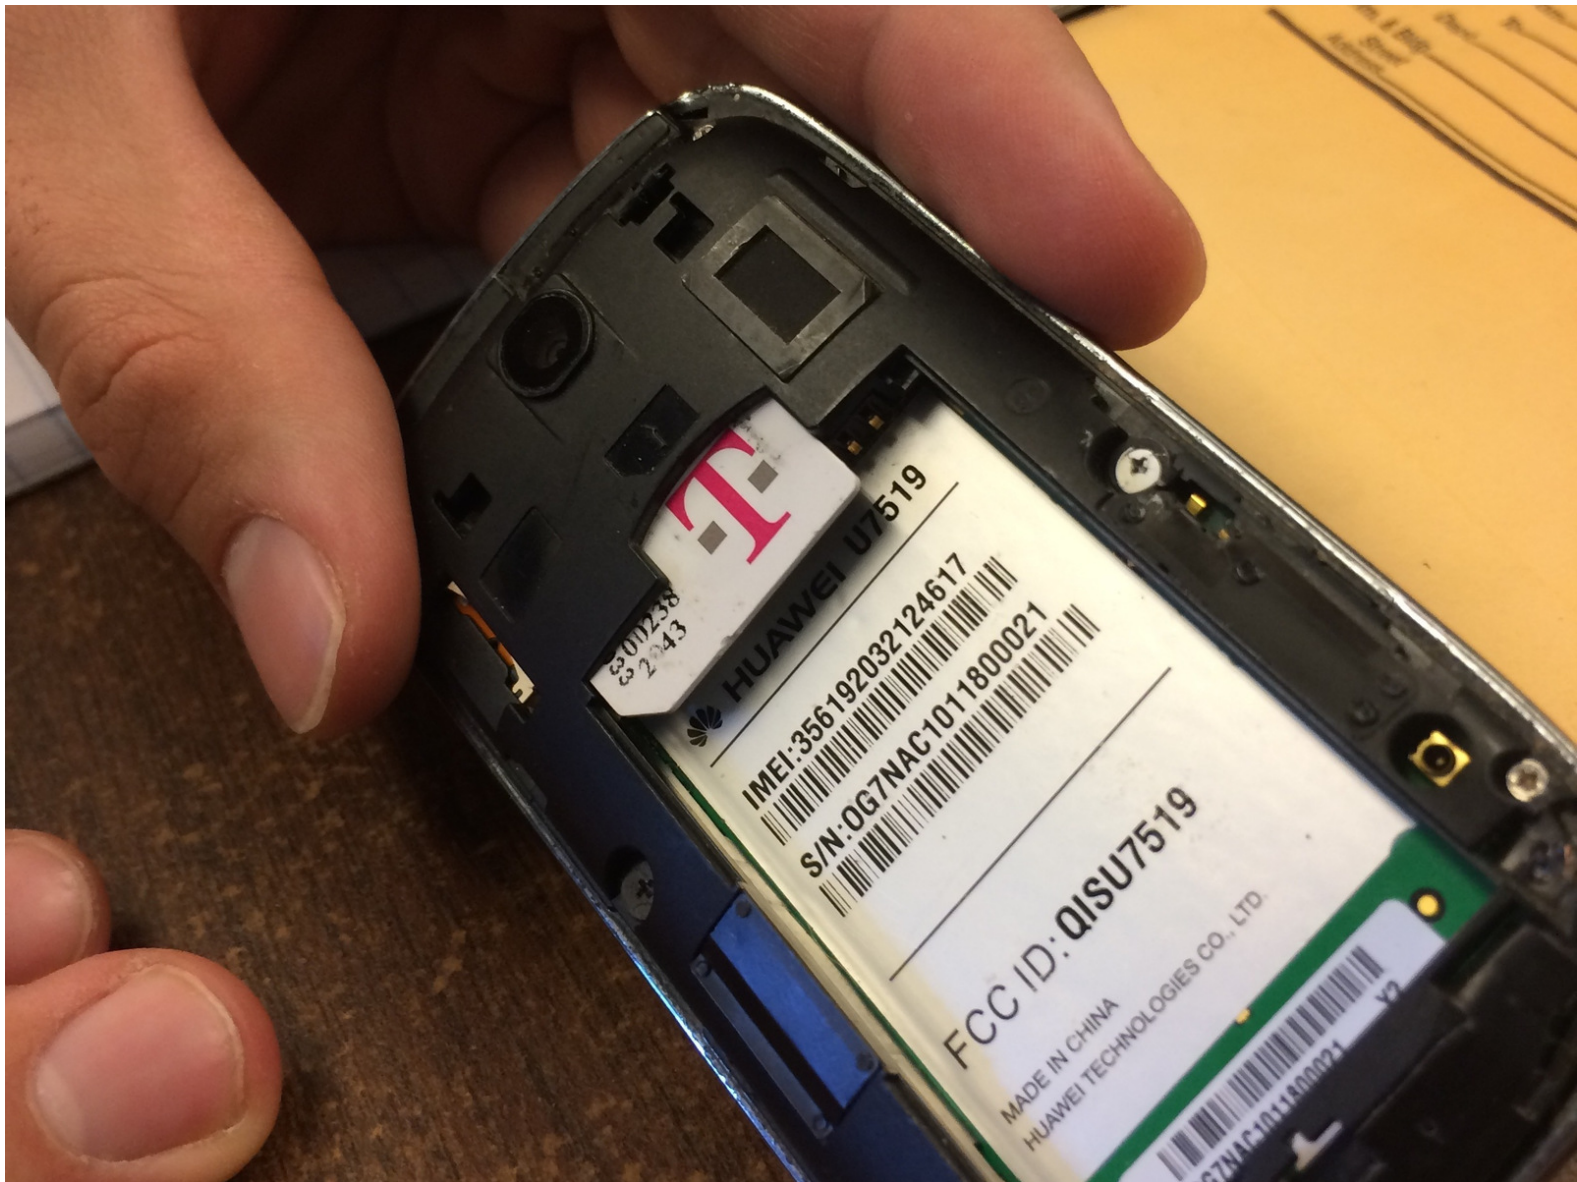



TOOLS:


- [Phillips #0 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Back Cover



- Take off the back covering of the phone along with the battery and SIM card.
- The SIM card is located above the battery.

Step 2

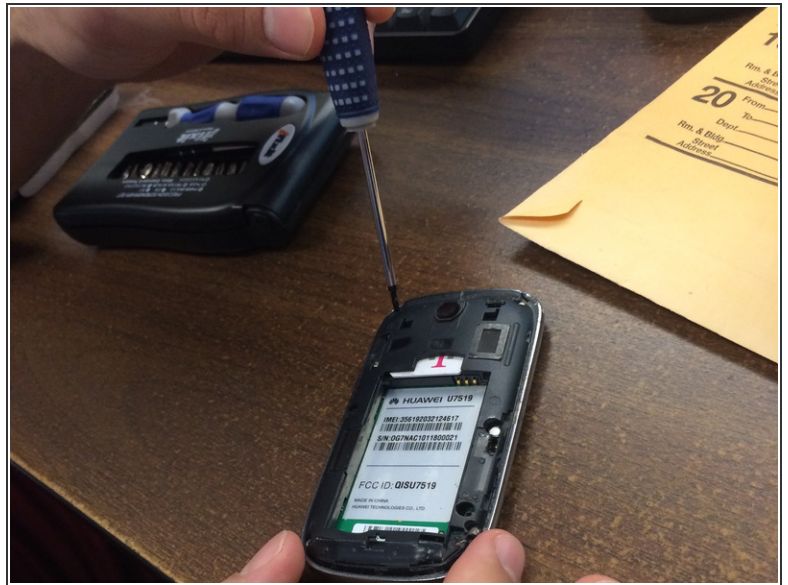


- Using the Phillips #00 Screwdriver, take out the four small screws located at the four corners of the phone.
- ① Save the screws. They will be needed for reassembly.

Step 3




- Using the same screwdriver, take out the two bigger screws located on each side of the battery compartment.
- NOTE: Save the screws. They will be needed for reassembly.

Step 4

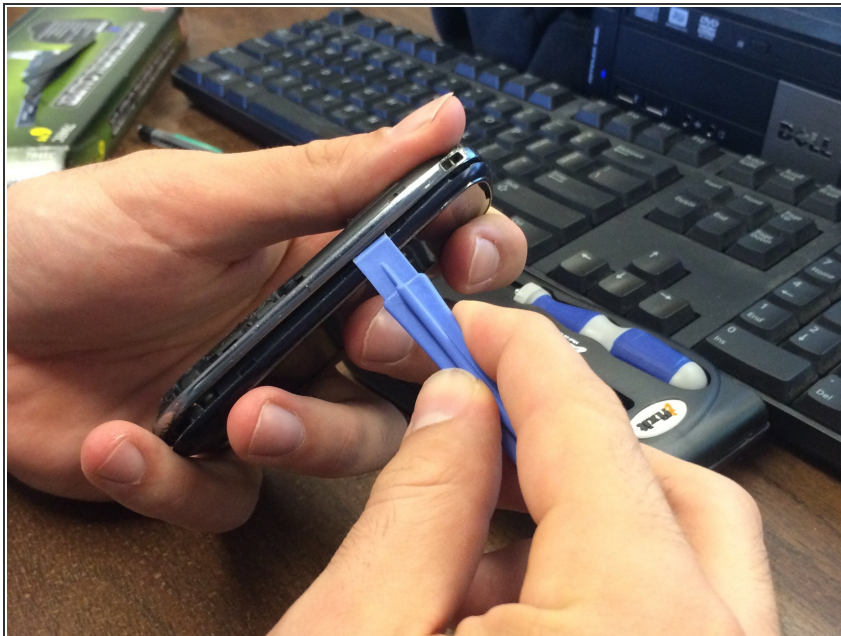

- Once all the screws are removed, use the iPod opening tool to pry off the back covering of the phone along the edge of the back cover and you will have access to the motherboard.
- Note: The power and volume buttons will fall out of the phone. Set aside for reassembly.

Step 5

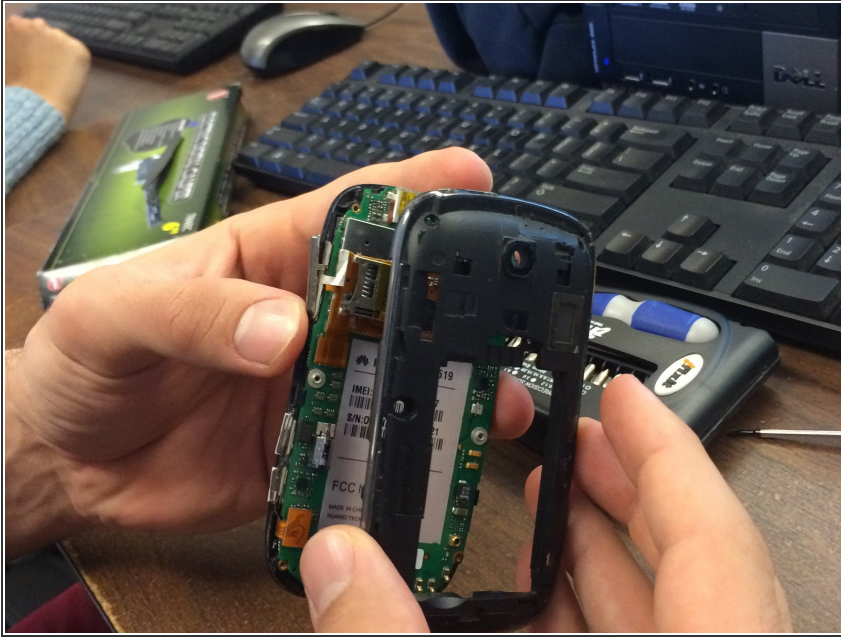

- Carefully pull the backing of the phone from the motherboard with your hands.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-25 01:49:51 PM.